


Transportation, Storage Boxes

General information:

- all containers are hot-gip galvanized
- can be used by crane and stapler
- max. bearing capacity of lifting brackets 1500 kg
- max. angle of lifting tackle to horizontal: $\alpha = 60^\circ$
- take care of wind load when stored in open air

UNI Container:

Outer dimensions: 1200 x 800 x 710mm
Filling height: 600mm
Bearing capacity: 1500 kg
Models: with or without flap
Load: max: 10000 kg

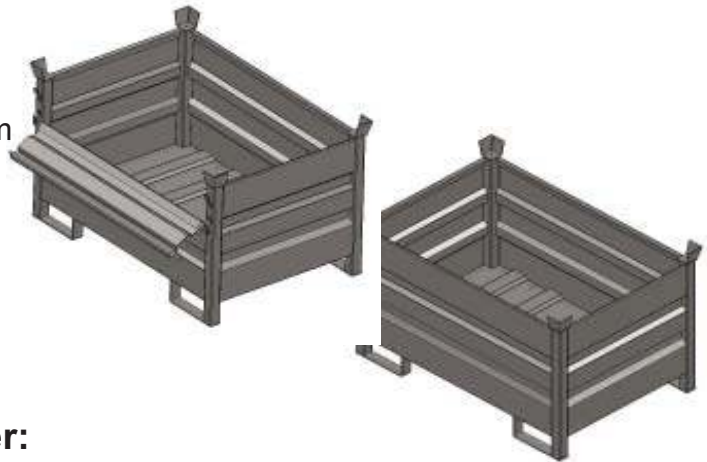

Ringer Multi purpose container:

Outer dimensions: 1140 x 740 x 710mm
Filling height: 600 mm
Bearing capacity: 1500 kg
Load: max: 10000 kg



Ringer pallet cage:

Outer dimensions: 1700 x 800 x 1100mm
Filling height: 880 mm
Bearing capacity: 700 kg
Load: max: 3500 kg
Base: 15mm plywood



Item	Art.-No.	Weight
Uni Container with flap	260V10	72 kg
Uni Container without flap	260V11	70 kg
Ringer Multi purpose container	260V12	70 kg
Ringer pallet cage	260V13	87 kg

AN 01/16